

**Straps vertically
the loads quickly
and reliable**



2100

Automatic strapping machine side sealing with lance


High performance automatic strapping machine. Very fast. Maximum reliability.

- Designed and manufactured using highest quality components.
- Aluminium head set and tension roller treated ensures long life of the machine.
- Tension electronically adjustable through a magnetic clutch to get the strongest tension without any physical effort.
- Electronic control of the tension, heating, cutting and length of the strap.
- Adjustment of the cooling after sealing to get better sealing quality, especially for hard packages (wood, iron, etc).




OPTIONS:

- Available in a range of different dimensions of arch.
- Double magazine for big arches.
- Movement of the all machine to look for the pallet.
- Machine prepared to be putted in an automatic line.

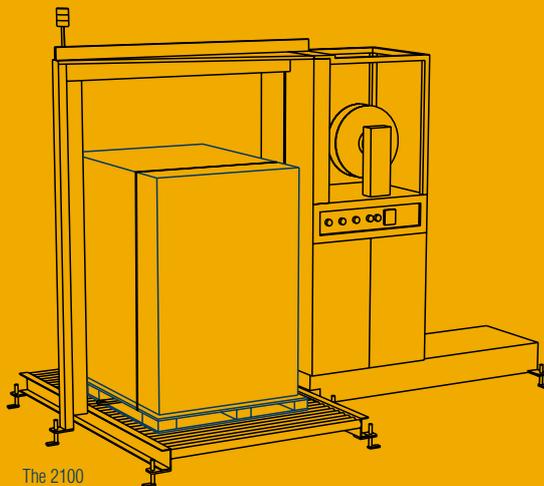

The 2100 is prepared to be putted in an automatic line.

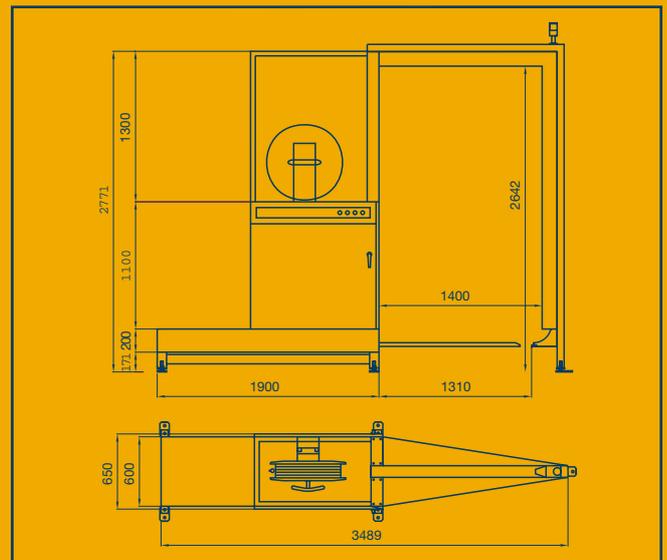

CHARACTERISTICS

VOLTAGE: 220V / 380 V · 50 / 60 Hz. 3 phase.

ELECTRIC CONSUMPTION: 1 Kw.

APROX. PRODUCTION: 20 pallets / hour.

PACKAGING DIMENSIONS: 1 package (200 Kg.).

210 X 70 X 240 cm.

TECHNICAL SPECIFICATIONS

STRAP WIDTH: 12-15,5 mm.

STRAP THICKNESS: 0,50-0,85 mm.

HEATING SYSTEM: Heating temperature and cooling time adjustable.

01/04 Edition -We reserve the right to made any modification without prevention.

Reisopack s.l.

Polígono Industrial "Z"
C/ De la Prensa, 3
08150 Parets del Vallès (Spain)

Tel. 902 153 448 - Fax 935 624 186
http://www.reisopack.com
E-mail: reiso@reisopack.com

(+34) 902 153 448