

# Reisopack®

Automatic strapping machine  
**Vertical strapping with top seal**

2200

*Strapping technologies*

**The compatible solution  
for vertical strapping**



### 2200

#### Automatic strapping machine Vertical strapping with top seal

**Automatic machine for the vertical strapping of pallets irrespective of their size.**

- Our own in-house manufacture and technology using top quality European components.
- Aluminium head, tempered tension rollers for longer machine life.
- High tension levels achieved through adjustable clip system.
- Electronic control of the entire strap tensioning, sealing, cutting and feed process.
- Incorporated selector for polypropylene and polyester strapping.
- Equipped with seal cooling timer to improve seal quality.
- Prepared for integration into fully automatic lines.
- Safety standards. CE marking.





#### OPTIONS:

- Available in a multitude of different sized arches, from 1,000 mm to 3,000 mm, in both width and height.
- Telescopic bayonet for strapping pallets by passing the strap through the pallet woodwork.



The control panel contains a selector for polypropylene or polyester strapping.

The 2200 is a top sealing machine, avoiding limitations on height and position of the pallet.

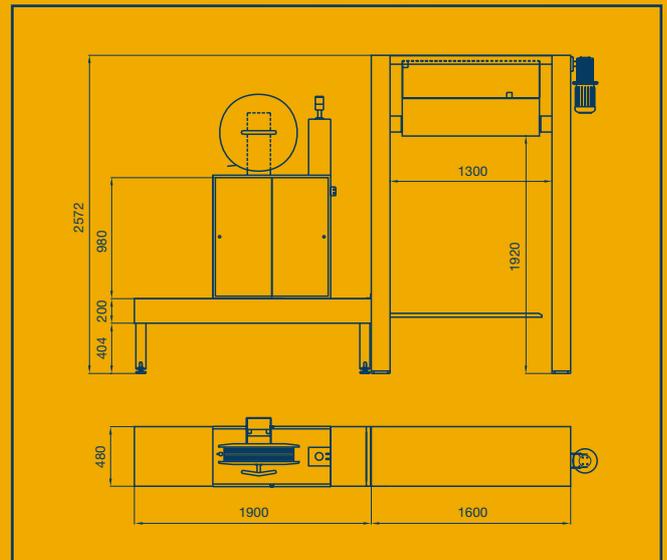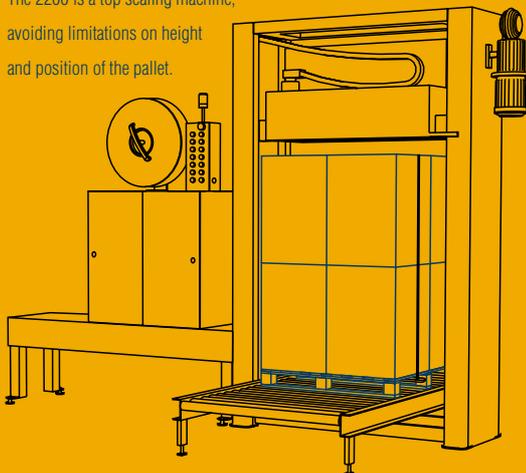

#### GENERAL CHARACTERISTICS

REQUIRED VOLTAGE: 220 V / 380 V · 50/60 Hz Three-phase.

CONSUMPTION: 1 Kw.

APPROX. PRODUCTION: 80 pallets / hour.

PACKED MACHINE DIMENSIONS: 1 package (200 Kg.).

210 X 70 X 240 cm.

#### TECHNICAL SPECIFICATIONS

STRAP WIDTH: 12-15.5 mm.

STRAP THICKNESS: 0.70-0.85 mm.

SEAL-WELDING: By electrical resistance.

Adjustable sealing temperature and cooling time.

01/04 Edition -We reserve the right to made any modification without prevention.

Reisopack s.l.

Polígono Industrial "Z"  
C/ De la Prensa, 3  
08150 Parets del Vallès (Spain)

Tel. 902 153 448 - Fax 935 624 186  
http://www.reisopack.com  
E-mail: reiso@reisopack.com