


Reisopack®

Strapping technologies

**Maximum performance
in pallet strapping**

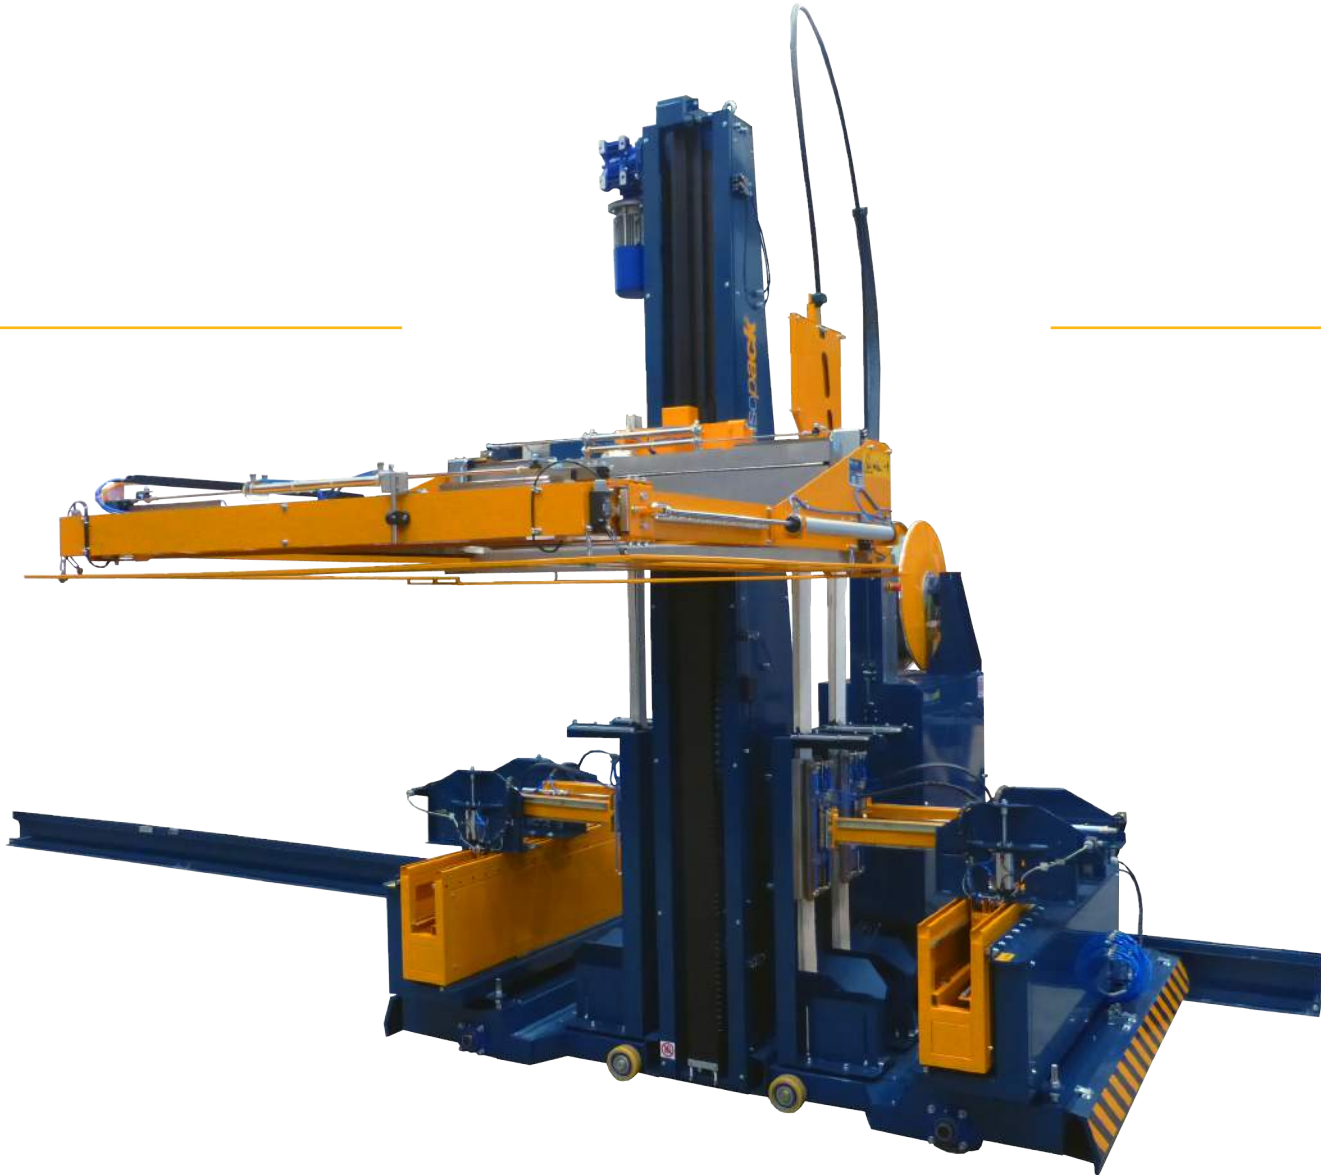

Strapping machine
Horizontal Automatic for pallets

2914

2914

Strapping machine Horizontal Automatic for pallets

Automatic horizontal strapping machine with lateral displacement. Take a leap in productivity in your business!

- Own manufacturing and technology using highest quality components.
- Compression system in the arch compacts load and guides the strap to the correct position.
- Mechanical tension adjustable through a holding strap system to get the highest tension.
- Aluminium head Reisopack 1900 long lasting.
- Approximate production higher than 50 pallet per hour.
- Security system under the arch with reverse engine.
- Visual signaling errors.
- Touchscreen control 5'6 inch TFT LCD.
- Able to store up to 10 different strapping programs.
- Automatic corners applicator system.

OPTIONS:

- Electronic tension.
- Strap empty alarm.
- CRC technology to perfectly reposition of the corners.
- Side compactor system.
- Motorized corners carts.
- Dual corners deposit.
- Fifth corners arm.
- Additional station.

It allows you to select between the different stored strapping programs with pressing a button.



The machine moves laterally between the different stations.

| CHARACTERISTICS |
|---|
| VOLTAGE: 220 V / 380 V · 50 / 60 Hz. Triphasic |
| ELECT. CONSUMPTION: 2 Kw. APROX. PRODUCT.: 50 pallets / hour. |
| COMPRESSED AIR PRESSURE: 6 atm. |
| MACHINE DIMENSIONS: 2902 X 4180 X 4550 mm. |
| MAXIMUM PALLET HEIGHT: 2650 mm. |
| TECHNICAL SPECIFICATIONS |
| STRAP WIDTH: 8-12-15'5 mm. (Factory set). |
| STRAP THICKNESS: 0,63-0,85 mm. |
| HEATING SYSTEM: Electrical heating. |
| Heating temperature and cooling time adjustable. |
| MINIMUM STRAPPING HEIGHT: 140 mm. |

07/15 Edition - We reserve the right to make any modification without prevention

Reisopack s.l.

Polígono Industrial "Z"
C/ De la Prensa, 3
08150 Parets del Vallès (Spain)

Tel. 902 153 448 - Fax 935 624 186
http://www.reisopack.com
E-mail: reiso@reisopack.com

Customer service: ☎ (+34) 935 735 340